
(POK-26-007) STORE SPACE PRODUCTION BID

BRANDWALL POKÉMON EPIC GAME LIBERDADE

75 LAB's response, with the executive engineering package and the augmented-reality preview already delivered at no charge. São Paulo, November 4, 2026.

START → SEE THE DRAWINGS → CONTENTS

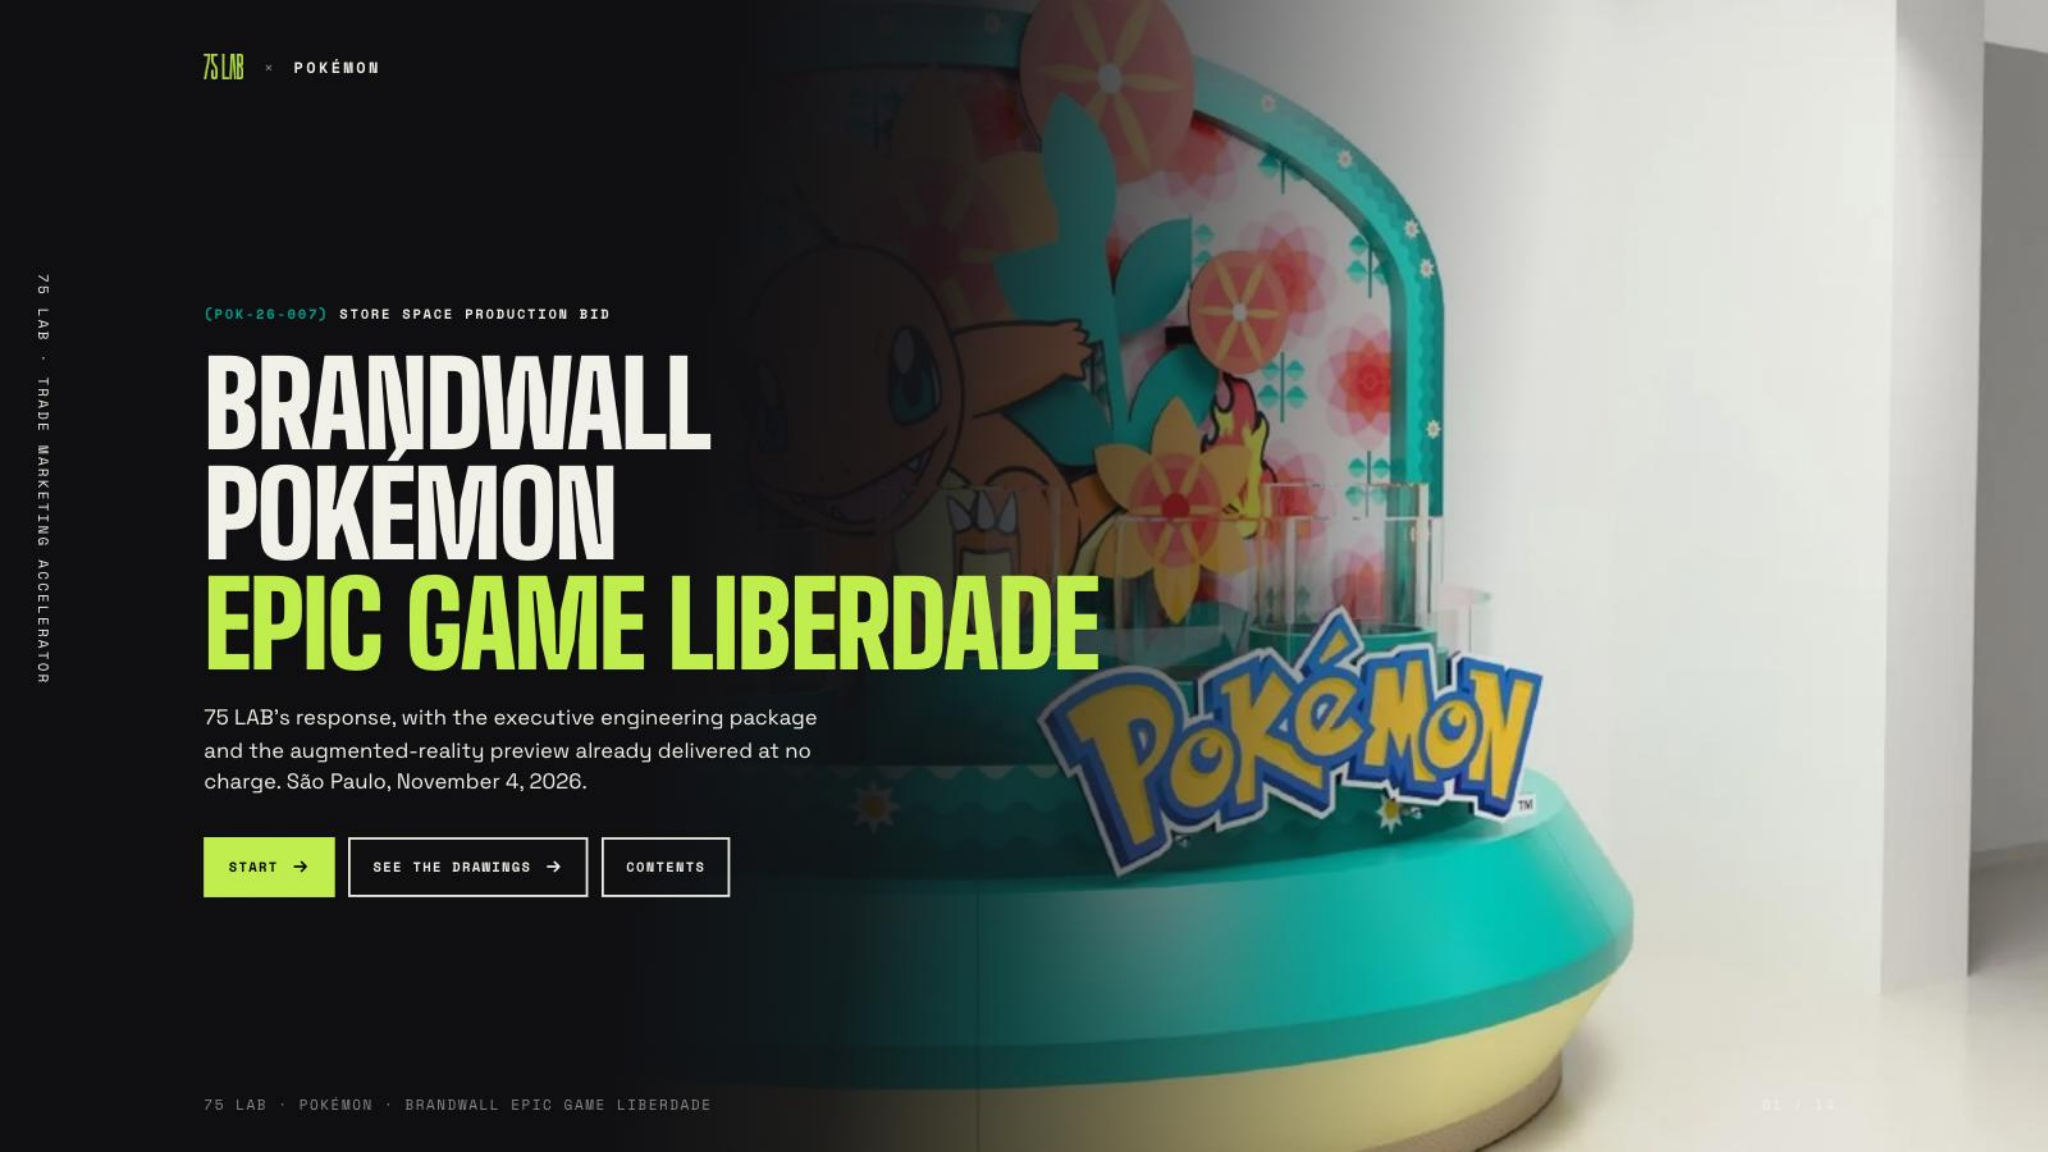

EXECUTIVE SUMMARY · THE WHOLE PROPOSAL ON ONE PAGE

THE PROJECT ARRIVED AS A CONCEPT AND LEAVES THIS TABLE READY FOR THE FACTORY

01

THE CHALLENGE

1

TECHNICAL PAGE IN THE FILE WE RECEIVED

The approved rd3 is a six-slide deck. The domes and the base guard requested on Oct 27 were not in it.

02

OUR ANSWER

16

TECHNICAL PLATES, REVISION R00

Sections, flat patterns, hardware, calculation memo and cut files in DXF. Document POK-26-007 R00, at no charge in this bid.

03

HOW WE DELIVER

5

FABRICATION ALTERNATIVES QUOTED

Five factories in our network started from the same engineering package. 75 LAB coordinates production and is your single point of contact.

04

HOW WE MEASURE

12

MONTHS OF FIXED DISPLAY

898 kg spread over 46 levelling feet, modules that fit through a 0.90 m door, and a spare-parts kit specified in the drawings.

- ✓ **Engineering and AR** come at no additional cost in this bid
- ✓ **60 days** for Pokémon to pay; 75 LAB pays the factory up front
- ✓ **Recommendation:** pick the alternative and open the technical equalization in the same week

CHAPTER 01 OF 02

WHAT THE FILE DID NOT HAVE

The approved material shows the piece. It does not say what it is made of, how it stands, or how it gets into the store.

01 Six presentation slides, one technical page

02 The technical levelling, item by item

03 The two requested guards were not in the file

04 The 16 plates we delivered at no charge

01
What the file did not have

02
From approval to the store

(01) THE SOURCE MATERIAL

THE APPROVED FILE HAS SIX SLIDES AND ONLY ONE OF THEM IS TECHNICAL

P0K-26-007 rd3, dated Oct 14, is a 16:9 deck exported from a slide editor: cover, three renders, one dimension page and a thank-you. As a concept it is finished. As a fabrication document it is one page long.




pagina 1


pagina 2


pagina 3


pagina 4


a unica pagina tecnica



pagina 6

6

SLIDES IN 16:9

Presentation format, 720 by 405 points, exported from a slide editor.

1

PAGE WITH A TECHNICAL DRAWING

Page 5 holds elevation, side view and plan in a single drawing.

6

DIMENSIONS, IN INCHES

148", 116", 86", 74", 59.5" and 30". They sit inside an image, not as text.

0

LINES OF SPECIFICATION

No material, thickness, hardware or finish appears anywhere in the file.

IMPLICATION A single dimension page approves the concept. It does not buy board, set a thickness, or hold 898 kg upright for a year on the shop floor.

(02) FROM CONCEPT TO FACTORY DOCUMENT

WE LEVELLED WHAT WAS MISSING SO THE PIECE COULD ACTUALLY BE QUOTED

Thirteen days separate the two documents. The one on the right is what went to all five factories, and it is why all five are looking at the same piece.


	RECEIVED · RD3 · OCT 14	POK-26-007 R00 · 27/10
FORMAT	6 presentation slides in 16:9	16 A2 plates
DRAWING PAGES	1	15
UNITS	inches, inside the image	millimetres, dimensioned part by part
MATERIAL AND FINISH	NOT STATED	material and finish schedule
STRUCTURE AND FIXING	NOT STATED	ribs, joints, anchoring and 46 levelling feet
TRANSPORT AND ASSEMBLY	NOT STATED	modules, load volumes and a 6-step sequence
FILE FOR THE FACTORY	PDF and one .ai artboard with the artwork	DXF R2018, cut files and a quantity sheet
DOMES AND GUARD	NOT PRESENT	plates F07 and F08, designed from scratch

IMPLICATION That levelling is what makes it possible to ask five factories to price the same piece. Equalizing each quote, line by line, is the next step, once the alternative is chosen.

(03) THE TWO REQUESTS OF OCT 27

THE TWO GUARDS YOU ASKED FOR WERE DESIGNED FROM SCRATCH


Domes over the pedestals and a guard around the base, with the logo on the outside. Neither existed in the approved file; both entered the engineering package with cutting, locking and bending process defined.



DOMES OVER THE FIVE PEDESTALS

5 mm acrylic, 450 by 400 mm, with a 6 mm cast lid and clip locking. Product is swapped without tools.

UNITS	5 + 1 SPARE
WEIGHT EACH	4,5 KG



GUARD AROUND THE BASE

10 mm cast acrylic in three heat-bent segments, never cold-bent. The logo sits on the band on stainless spacers, outside the guard.


SEGMENTS	F1 · F2 · F3
LOGO	OUTSIDE THE GUARD

IMPLICATION The product stays protected and the brand stays visible with no acrylic in front of it, which is exactly what the October 27 email asked for.

(04) COMPLIMENTARY DELIVERY 01 OF 02

THE 16 PLATES ARE YOURS AND THEY ARE NOT ON THE INVOICE

Complete R00 engineering package, A2 PDF per sheet plus DXF for the factory, with a quantity sheet and the cut files. Our investment, made before there was an order.

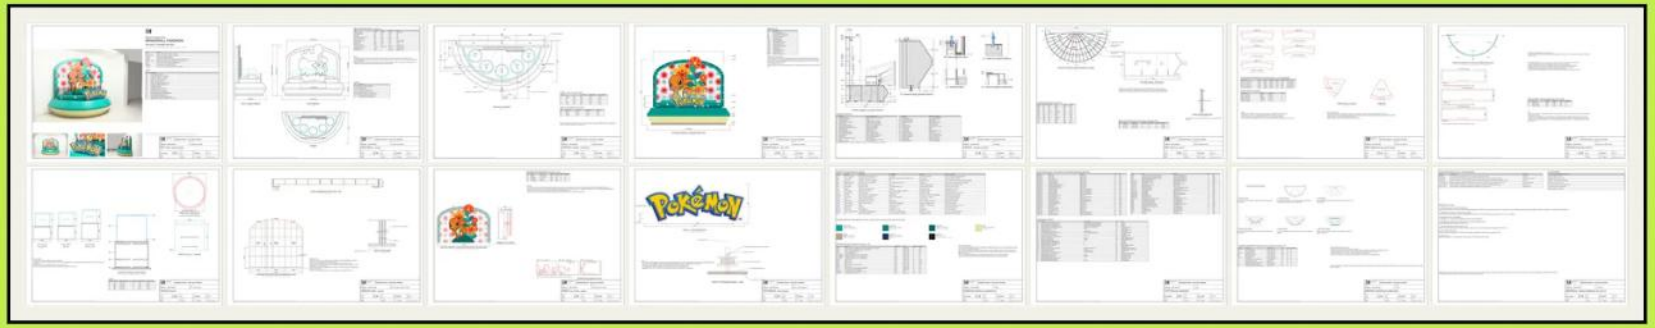

898

KILOS ON 46 LEVELLING FEET

Load spread and levelling solved on paper, not on site.

0,90 m

THE DOOR EVERYTHING FITS THROUGH

Base B1–B3 and wall W1–W3 fit through a 0.90 by 2.10 m door.

3,25 m

THE MINIMUM CEILING HEIGHT

The highest point is 3,086 mm. The clearance is 164 mm and has to be checked on site.

4 × 2

FITTERS BY WORK SHIFTS

Assembly with no glue on site, in two shifts, with a spare-parts kit specified.

IMPLICATION Whichever alternative you choose starts from a finished, checked document rather than from a private reading of the render.

CHAPTER 02 OF 02

FROM APPROVAL TO THE STORE

Before anything is cut, you see the piece at full scale. After that, 75 LAB coordinates the factory and finances the operation.

01 Full-scale approval, from a phone

02 Five alternatives for the same piece

03 What each factory in the network has built

04 Who pays the factory, and when

05 The next step

02


01
What the file did not have

02
From approval to the store

(01) COMPLIMENTARY DELIVERY 02 OF 02

YOU APPROVE THE BRANDWALL AT FULL SCALE BEFORE ANYTHING IS CUT

The augmented-reality preview places the piece on the Epic Game floor at 1:1 scale, from a phone. Also at no charge in this bid.

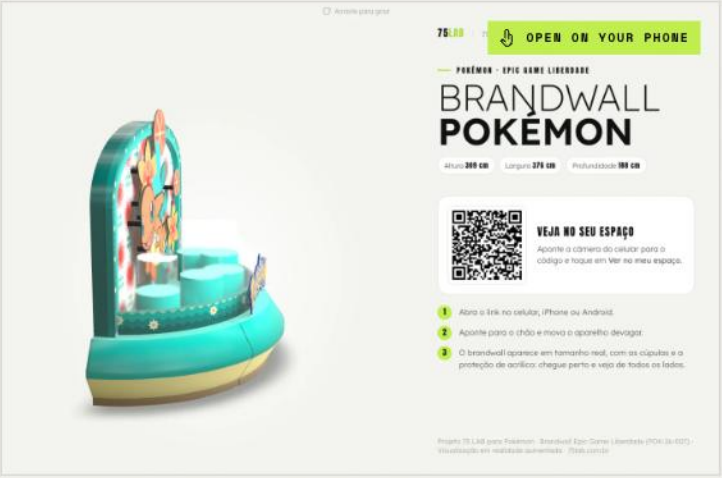

01 Open the link on a phone, iPhone or Android, and point the camera at the floor.

02 The brandwall appears at full size, with the domes and the acrylic guard.

03 You can walk around it, get close to the band and check the height against the shelving.


OPEN THE AR EXPERIENCE →

IMPLICATION The conversation about size, position and circulation happens now, with the store at hand, rather than with the piece already standing in Liberdade.

(02) WHAT THE NETWORK CAME BACK WITH

FIVE ALTERNATIVES FOR THE SAME PIECE, WITH A 5.4-FOLD SPREAD END TO END

We took the same engineering package to five factories in our network. The figures are in the quote that comes with this deck; here is the ratio between them, with the lowest quote as the baseline.

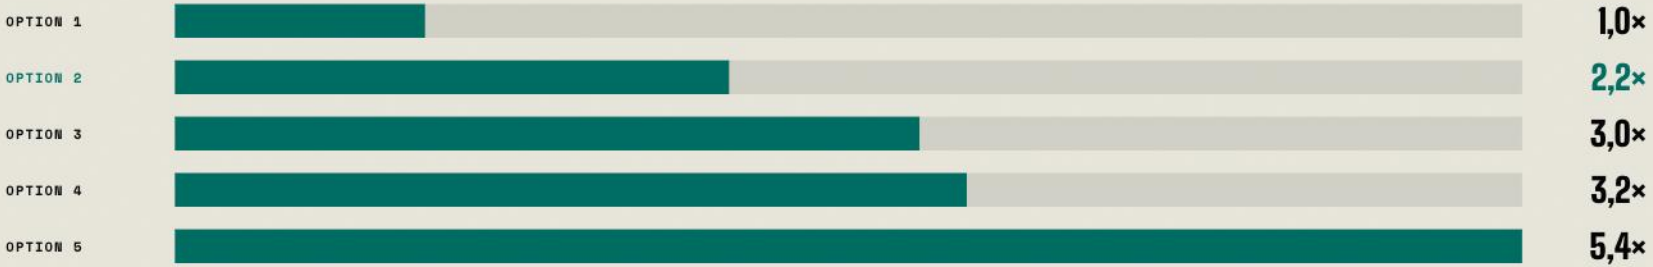

THE FIVE ARE INDEPENDENT ALTERNATIVES, THEY ARE NOT CUMULATIVE, AND THEY ALL START FROM THE SAME REFERENCE ENGINEERING PACKAGE. FINAL SCOPE, MATERIALS, LOGISTICS AND INSTALLATION ARE CONFIRMED IN THE TECHNICAL EQUALIZATION OF THE CHOSEN OPTION.

IMPLICATION The gap between the extremes is not only price: it is repertoire and factory process. Choose by what each one has already built, not by the number alone.

(03) THE NETWORK THAT QUOTED

EACH ALTERNATIVE BRINGS A DIFFERENT FABRICATION REPERTOIRE

Five factories, five track records. We show what each has already built; the names stay with 75 LAB, which handles contracting and quality control.

OPTION 1



Sculpture and character atelier, with bespoke artistic pieces for sets and television.

OPTION 2



Totems, display units and acrylic cases for retail, brand activation and exhibitions.

OPTION 3



Scenography and high-finish booths for brands, trade shows and experience spaces.

OPTION 4



Visual communication and store environments at chain scale, with field operations.

OPTION 5



Technical acrylic, woodwork and metalwork in its own plant, with nationwide roll-out experience.

IMPLICATION The choice of alternative is yours. Technical coordination, production follow-up and quality control stay with 75 LAB in all five.

(04) COMMERCIAL TERMS

75 LAB PAYS THE FACTORY UP FRONT AND WAITS 60 DAYS FOR YOU

The factory works on cash terms. Pokémon pays in 60 days. The gap between those dates is working capital, and it sits with the agency — already priced into the quote.

APPROVAL

D+0

ALTERNATIVE CHOSEN, TECHNICAL EQUALIZATION OPENED AND THE ORDER PLACED WITH THE FACTORY.

75 LAB

CASH

75 LAB ADVANCES PAYMENT TO THE SUPPLIER AND TAKES ON THE FINANCING OF THE OPERATION.

POKÉMON

D+60

PAYMENT TO 75 LAB IN 60 CALENDAR DAYS, IN A SINGLE INSTALMENT, AS PER THE QUOTE.

INVOICING

Invoicing in 2026 and installing in 2027, as you asked in the October 27 email, is possible and foreseen. The exact date depends on commercial and tax alignment between the parties.

IMPLICATION

You close the year with the project invoiced without advancing cash to the factory, and with a single point of contact for production, quality and schedule.

(05) WHAT WE ASK FOR NOW

THE NEXT STEP IS CHOOSING THE ALTERNATIVE AND OPENING THE EQUALIZATION

Once the option is set, we confirm scope, materials, logistics and installation with the factory, and bring back a closed schedule for Pokémon to approve.

01

CHOICE OF ALTERNATIVE

Among the five options in the quote, based on price and on each factory's track record.

POKÉMON

02

TECHNICAL EQUALIZATION

Item-by-item confirmation of materials, finishes, lighting, freight, installation and removal.

75 LAB

03

CLOSED SCHEDULE

Fabrication, delivery and installation, with the technical visit to Epic Game booked before cutting.

75 LAB

04

SUPERVISED PRODUCTION

Quality control at the factory, material validation and supervision of the on-site assembly.

75 LAB

IMPLICATION No material decision is left for the factory to take alone after the order: it is confirmed in the equalization, before anything is cut.

75 LAB

THANK YOU

Every figure in this proposal is open for discussion, and the engineering package stays with you whatever the outcome of this bid.

COMMERCIAL AND ADMINISTRATION

DANIEL COIMBRA

Founding partner · CEO

daniel.coimbra@75lab.com.br

11 99127-0939

SEE THE BRANDWALL IN AR →

BACK TO START →

75 LAB Estratégia, Design e Produção Ltda · CNPJ 55.478.982/0001-77 · Rua Jurubatuba, 1250, conj. 013, Centro, São Bernardo do Campo, SP · contato@75lab.com.br · 75lab.com.br
Pokémon · POK-26-007 · Brandwall Epic Game Liberdade · production bid · Nov 4, 2026